


Belt-Drive System

Transfers full power from the engine to the tines. Shear pins on the tine shaft are designed to break if the tines hit an immovable object, to protect the engine and engine shaft from damage. (Four extra shear pins are included and they are simple to install. No tools required.)

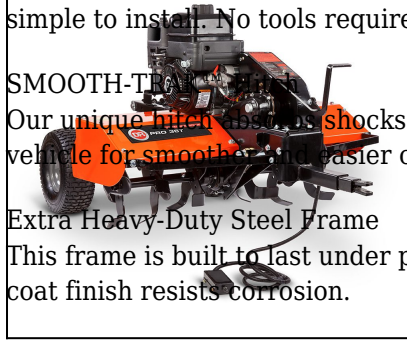

SMOOTH-TILT
Our unique **tine absorber shocks** and jolts so that minimal forward motion from the tiller is transmitted to the towing vehicle for smoother, easier operation.

Extra Heavy-Duty Steel Frame

This frame is built to last under punishing conditions. Made of 1-1/2" square tubing and 12-gauge steel. Baked on powder coat finish resists corrosion.

Transport Tires

The tires are pneumatic and 14" in diameter and 5-1/2" wide for easy rolling during transport.

DR Power Tow-Behind Rototiller

Step up to powered remote control of tilling depth, and 24 steel tines to get your work done even more easily with our PRO model Tow-Behind Rototiller. Compatible with ATV or garden tractor.

[Read More](#)

SKU:TT15036DEN

Price:\$3599.99

Categories:[DR Power Equipment](#)

Product Description

Top-of-the-Line PRO 36T Model!

Tow the DR Tiller behind your ATV, riding mower, or tractor and you'll break ground and turn soil faster and easier than you ever thought possible! The DR does the hard work while you ride in comfort and adjust the tilling depth by remote control.

Unlike walk-behind tillers, the DR® Tow-Behind Tiller doesn't divide its engine power between moving the machine forward and turning the tines. The full power of its overhead valve DR® engine is dedicated to the real task at hand, tilling the soil. Your tow vehicle takes care of the propulsion, and with its weight, actually holds the tiller back to create maximum churn (and prevents the tiller from lurching forward as walk-behinds often do).

The result is the DR® Tow-Behind will till unbroken ground, including tough sod, in a fraction of the time required by any walk-behind tiller. Even better, it is twice as wide as most ordinary tillers and applies twice the tine coverage. That means faster, more thorough tilling, with none of the strain associated with tillers that require sheer strength to control them. Instead, you just ride and relax.

Product Summary

- Engine: DR® Engine, 11.10 ft-lbs gross torque
 - Tilling Specs: 36" wide, up to 7.5" deep (variable)
 - Battery-powered actuator controls tilling depth by remote control.
 - Shock absorbing hitch absorbs jolts for a smoother ride
 - Electric-starting
-
- Machine: 2 years residential, 90 days commercial
 - Engine: 2 years residential, 90 days commercial

Features

Powered Actuator

The Actuator raises and lowers the wheels, which in turn raise and lower the tines. A holding force of 250 pounds assures the tilling depth remains where you set it. The Actuator is powered by a 12-volt, 17-amp battery that will raise/lower the machine over 100 times on a single charge.

Remote Control

The Remote Control allows you to make precise adjustments to your tilling depth without leaving your towing vehicle.

24 Bolo Tines

Forged of tough tempered steel, these tines spin at over 230 rpm to dig up to 7-1/2" deep and mix soil completely. The intricately designed sweeps and curves of each tine minimize the wrapping of vegetation.